FOR OTHER OPERATING INSTRUCTIONS PLEASE REFER TO THE MAIN INSTRUCTION USER MANUAL OF

HY1000Si
HY2000Si
HY3000Si

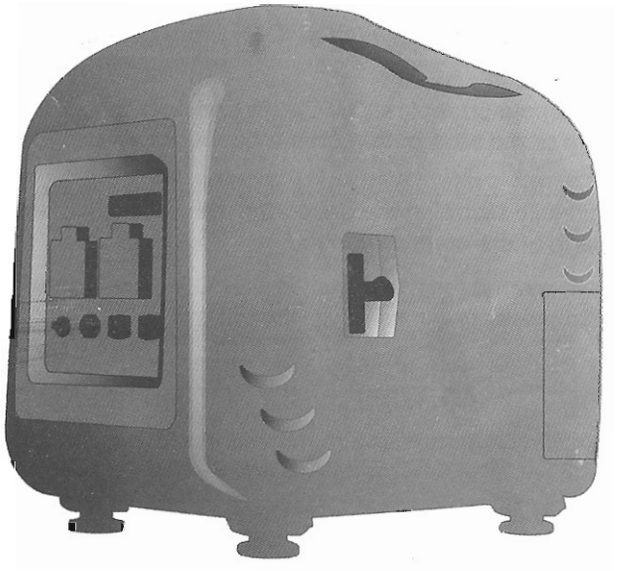

HYUNDAI

SUPPLEMENTARY OPERATING MANUAL FOR HY2000Sei & HY3000Sei

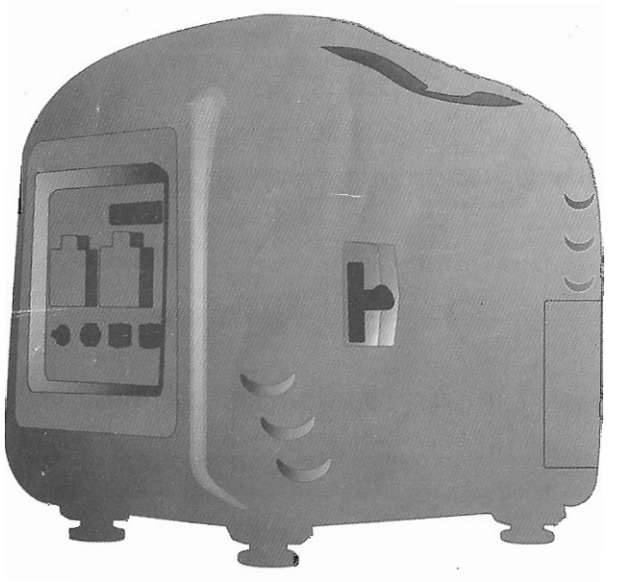

PLEASE READ THIS MANUAL CAREFULLY BEFORE USING

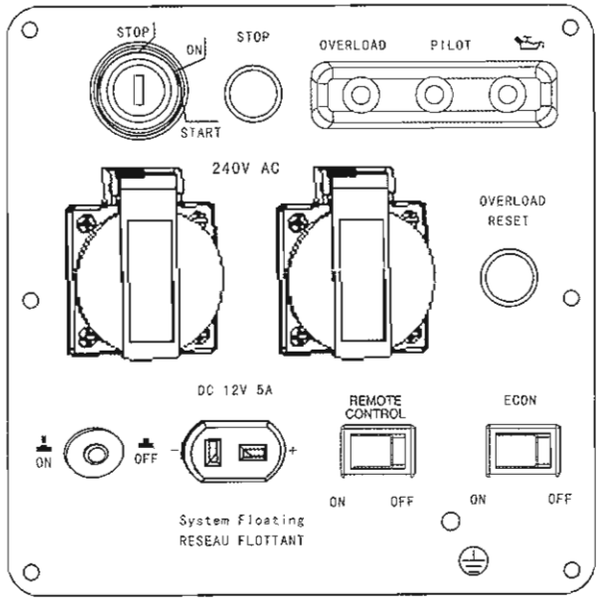

FRONT PANEL FOR ELECTRIC STARTER

1 OPERATING THE BATTERY

1.1 Connecting the battery

1. Loosen the cover screw and remove the battery access cover.
2. To connect the battery, plug the 2 connectors together.

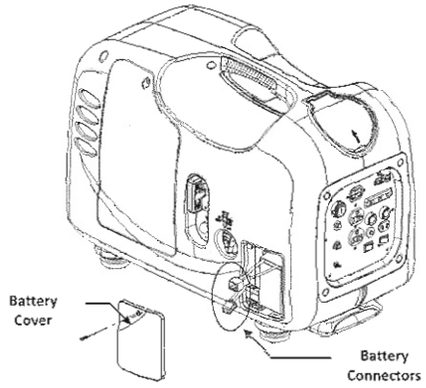

1.2 Battery Removal

1. To remove the battery for maintenance or replacement.
2. Loosen the cover screw and remove the battery access cover.
3. Unplug the battery and unhook the battery strap and slide out.

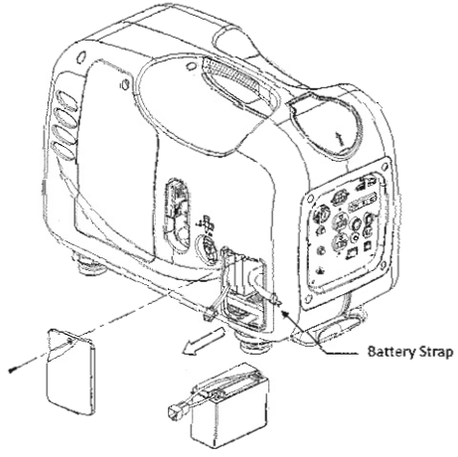

2 STARTING THE ENGINE

⚠ NOTE

This unit can be started by either the ignition key or remote. When the unit is started with the ignition key. It can be shut down by the Ignition key or the Emergency shut-down button on the control panel: but NOT by the remote. When the unit is started by the remote, it can be shut down by the remote. If you want to shut down the unit with the Ignition key when the unit has been started by remote, you will need to turn the remote control switch on the control panel to the "OFF" position before you can shut off the unit with the Ignition key. The unit can always be shut down by the Emergency button on the control panel no matter how you start the unit.

Before starting the engine, disconnect any load from the AC receptacles.

2.1 Starting procedure using the ignition key

1. Turn the fuel valve to the "ON" position.
2. If the fuel tank was empty it may be necessary to pump the primer bulb several times to get fuel to the carburetor.
3. Move the remote selector switch to the "OFF" position.
4. Turn the ignition switch to the START position until the engine has started. Do not operate the starter for more than 10 seconds. Repeat if necessary.

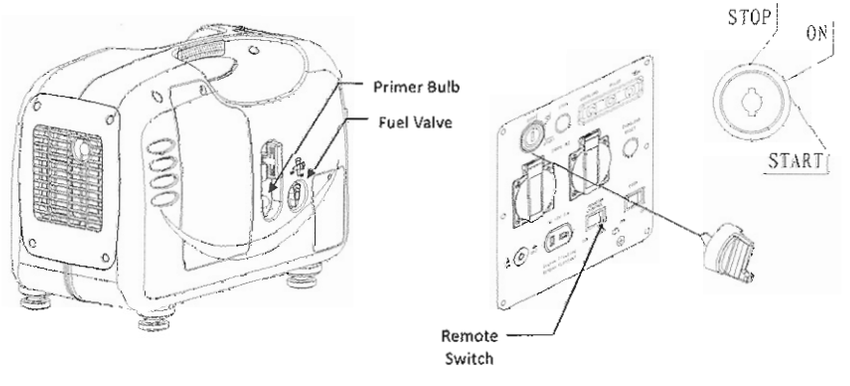

2.2 Manual Start

1. Turn the fuel valve lever to the "ON" position.
2. If the fuel tank was empty it may be necessary to pump the primer bulb several times to get fuel to the carburetor.
3. Move the remote selector switch the "OFF" position.
4. Turn the ignition switch to the "ON" position.
5. Pull the starter grip tightly until resistance is felt, then pull briskly out.

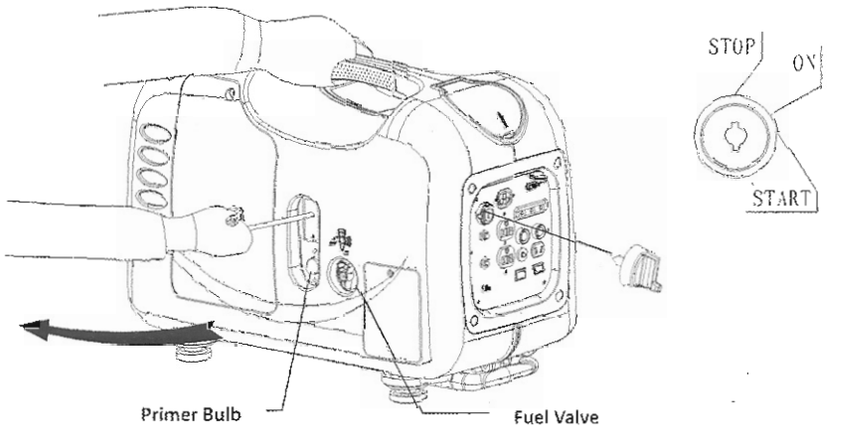

⚠ CAUTION

- Do not allow the starter grip to snap back. Return it slowly by hand.
- Do not let the starter rope rub against the generator body or the rope will wear out prematurely.

2.3 Starting procedure using the remote

1. Turn the fuel valve lever to the "ON" position.
2. Move the remote selector switch to the "ON" position.
3. If the fuel tank was empty it may be necessary to pump the primer bulb several times to get fuel to the carburetor.

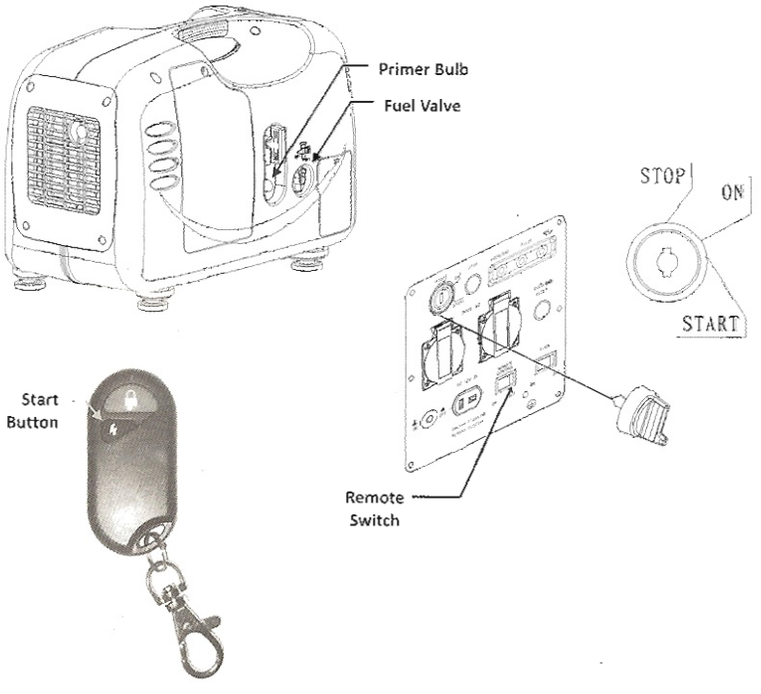

4. Push the start button on the remote twice and hold until the engine has started. Do not operate the starter for more than 10 seconds. Repeat if necessary.

⚠ NOTE

- The maximum operating range is 75' based on a clear line of sight.
- Always put the remote switch on the generator in the "OFF" position when not in use, to prevent running down the battery.

2.4 Stopping the engine

To stop the engine in an emergency:

1. Push the STOP button on the control panel. This will stop the unit or without the ignition key or remote.

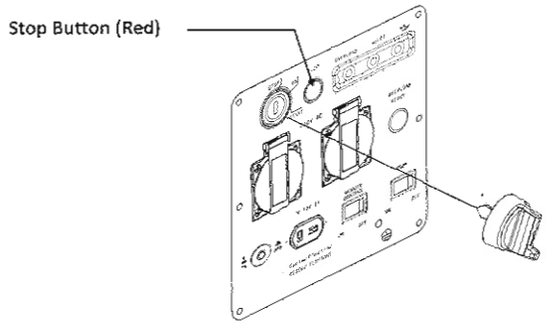

Normal Shutdown

1. Turn off the connected equipment and disconnect from the generator.
2. If the remote control switch is "OFF", turn the ignition switch to the OFF position.
3. If the remote control is "ON", push and hold the stop button on the remote or the stop button on the control panel until the engine stops.

- Continually stopping the generator with a load applied can lead to damage of the control module.
- Always put the remote switch in the "OFF" position when not in use, to prevent running down the battery.